

ENGINEERING
TOMORROW

Danfoss

Revolutionary **ETS Colibri®** valves
Engineered to give you maximum
flexibility and **dependability**

ETS Colibri® brings to the market one of a kind, uniquely designed electric expansion valve.



**Innovative
Design**

Compact, hermetic
and in-line valve
design driven by
stepper motor
technology.

3x Faster

ETS Colibri® can be driven fully closed in less than 4 seconds

4x Lighter

Thanks to its unique compact design.

Re-engineered for the next level

ETS Colibri® is the most innovative and uniquely designed electric expansion valve in the market.

Danfoss has a proud heritage of over 30 years in designing and producing electric expansion valves. During this time, we've dedicated all our experience to perfecting our products – giving you the most reliable and innovative valves in the market.

Today, ETS Colibri® is a result of our dedication and passion for engineering, built around uncompromised quality and performance. Its focus on energy efficiency ensues from placing great attention to our customers' needs.



ETS 12C – ETS 24C



ETS 25C – ETS 50C – ETS 100C


Compact, hermetic and in-line design

Compact design: Easily fits anywhere in the system

Lightweight body: No extra support necessary in your system to avoid tubing cracks caused by vibration

In-line design: Flexibility to install the valve in almost any plane

Hermetic: Uncompromised integrity of internal components and fewer leak points in the system result in reduced refrigerant loss potential and fewer service calls

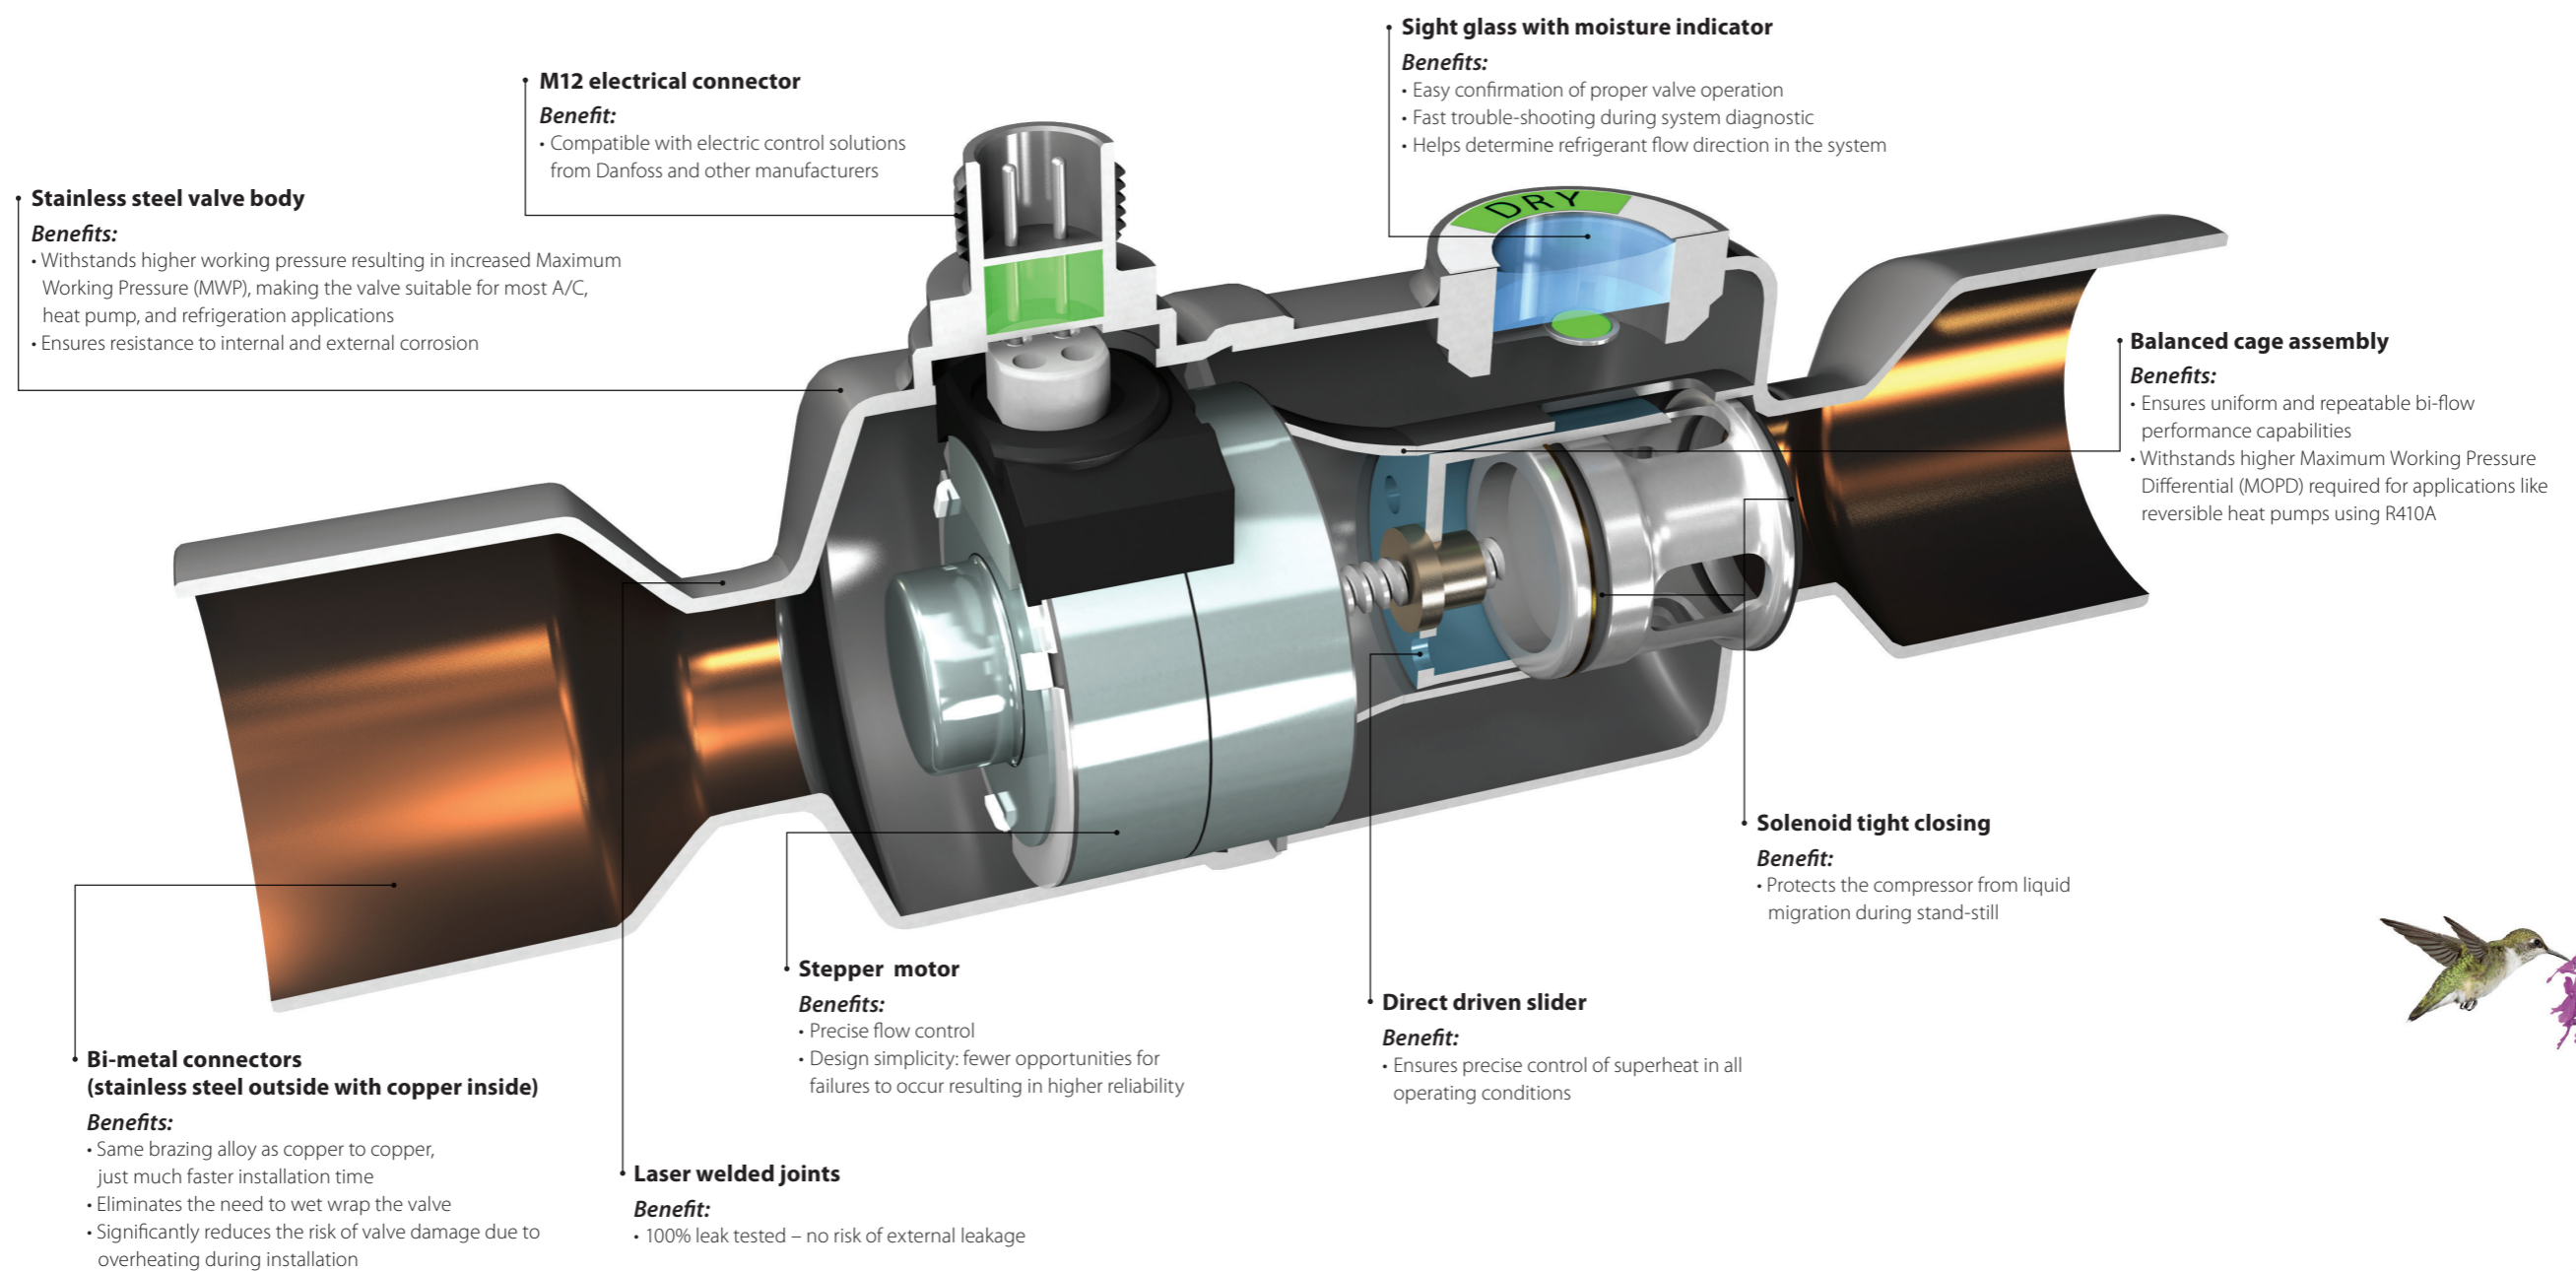


ETS Colibri® has been designed for precise liquid injection into evaporators for air-conditioning, heat pump and refrigeration applications. In addition, Colibri® valves are approved for oil-free operation, e.g. in systems with Danfoss Turbocor® oil-free compressors.

Thanks to its unique design, the Colibri® range can also be used as suction modulating valves in applications such as transportation and food retail.

The benefits of its linear opening and closing characteristics:

- Simpler control scheme allows for faster software development
- Faster reaction time at start-up leads to a low chance of starving the compressor

Electric expansion valves range

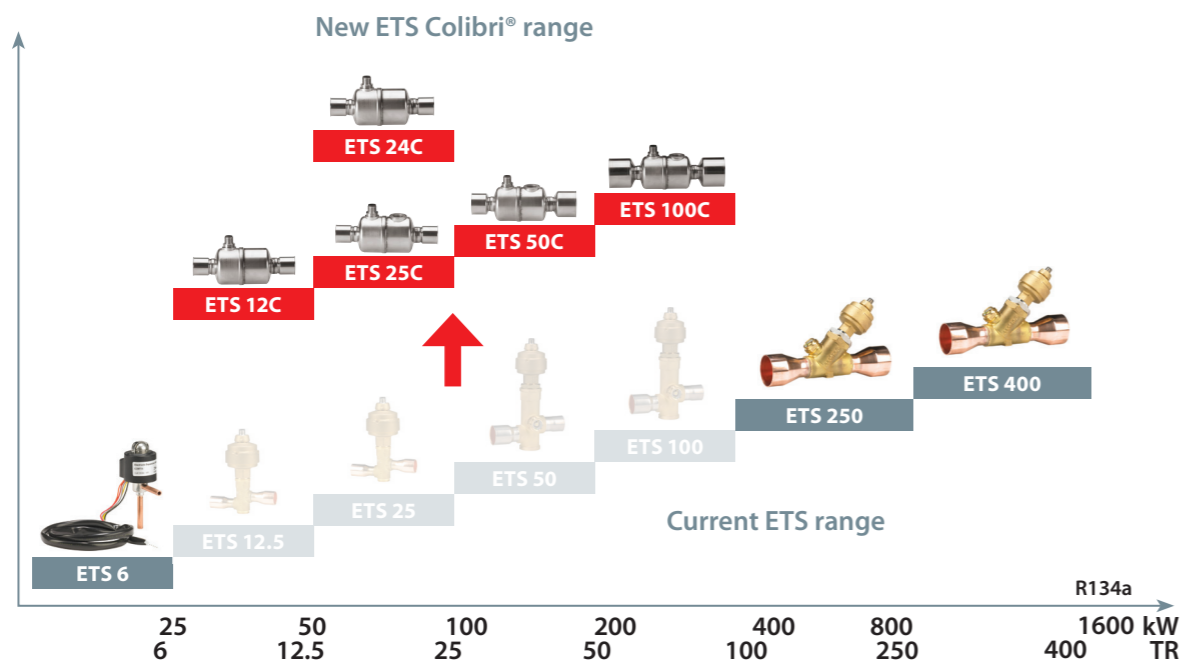

Technical data

Compatible refrigerants	R410A, R407C, R404A, R507, R134a, R290 (for other refrigerants, contact your Danfoss representative)
Refrigerant temperature range	-40 °C to 70 °C (-40 °F to 158 °F)
MOPD	40 bar (588 psi)
Max. working pressure (PS/MWP)	50 bar (735 psig)
Stepper motor type	Bi-polar - permanent magnet
Step mode	2 phase full step, micro-stepping (recommended)
Max. total power	7.2 W
Step rate	160 steps/sec. recommended (current control)
Total steps	600
Full travel time	3.75 sec. at recommended step rate

50 bar

working pressure ensures compatibility with all of the most widely used refrigerants.

ETS Colibri[®].
Innovative electric expansion
valves for **best in class**
air-conditioning, heat pump,
and refrigeration systems.

Increased energy efficiency with uncompromised quality.

