



LABEL (铭牌):



WIRING DIAGRAM (接线图):

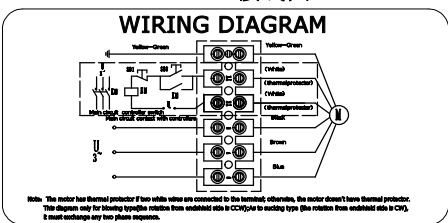

FLOW RATE CURVE (风量曲线):

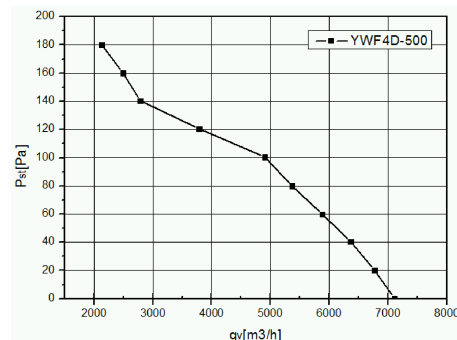

ErP2015 LABEL (ErP2015 标签):

ErP2015 (N40)
N=41.49 η statA= 32.8%
YWF4D-500S-P137/35

UNIT 类型	Axial fan motor
MOTOR 电机型号	Three phases motor
MOTOR TYPE 电机型号	YWF4D-500S-P137/35-G
VOLTAGE 额定电压 (V)	380
FREQUENCY 频率 (Hz)	50
INPUT POWER 输入功率 (W)	390
CURRENT 电流 (A)	0.99
SPEED 转速 (r/min)	1370
AIR FLOW 20Pa 风量 (m³/h)	6770
NOISE 噪音 (dBA)	71
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针, 从端盖端方向看
INSULATION CLASS 绝缘等级	F
MOTOR PROTECTION 电机保护	Thermocontact 150±5°C 热保护器
TEMPERATURE RISE 温升	75K max 运行温升不超过75K
PROTECTION CLASS 防护等级	IP54
OPERATING TYPE 工作定额	S1 连续工作制
AMBIENT TEMPERATURE 适用环境温度	-30°C +60°C
BEARINGS 轴承型式	Ball bearings 滚珠轴承
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装
ELECTRICAL CONNECTION 电源线	Lead wire RV-90 4G 0.75mm²+2G 0.30mm² , Length 100mm in terminal box connected 接线盒 (4芯0.75mm²+2芯0.3mm²线长100mm)
APPROVALS 认证标记	CCC、CE
NET WEIGHT/GROSS WEIGHT 净重/毛重	9.0/10.0kg
PACKING 包装	55*55*20.5cm

								SIGN	DATE	TITLE
										YWF4D-500S-P137/35-G
										PROJECTION
										A4
										SCALE
REV.	DESCRIPTION	APPROVED	DATE					DRN. BY		SHEET: of
								CHD. BY		
								ENG. BY		
								APP. BY		