

Data sheet

# Safety relief valves

## Type SFA 10 and SFA 15



The SFA 10 and SFA 15 are standard, **back pressure dependent** safety relief valves in angle-way execution, specially designed for protection of vessels and other components against excessive pressure.

The valve is designed to meet the strict quality demands and safety requirements for refrigeration installations, specified by the international classification societies.

The spring housing is closed tightly to avoid refrigerant leakage.

The inlet flow diameters of the valves are:

- 6.8 mm (¼ in.) for SFA 10 and
- 13 mm (½ in.) for SFA 15

The valves can be ordered with set pressure:

- between 10 and 65 bar (145 and 943 psig) for SFA 10
- between 10 and 40 bar (145 and 580 psig) for SFA 15

Standard pressure setting valves having "TÜV Pressure Setting Certificate" with each valve, are also available.

### Features

- SFA 10 (10 – 27 bar) and SFA 15 (10 – 40 bar) applicable for the refrigerants HCFC, HFC, R717 (Ammonia), R744 (CO<sub>2</sub>) within a temperature range of -50 °C to 100 °C (-58 °F to 212 °F)
- SFA 10 (28 – 65 bar) includes EPDM O-ring and is applicable for CO<sub>2</sub> with POE and PAG oil
- Easy installation by threaded connections and Union fitted welding nipples
- Wide capacity range
- Stable set-point and reliable resetting
- Leak proof internal and external
- Easy selection by use of Cool selector
- Available with or without TÜV pressure setting certificate
- Classification:  
To get an updated list of certification on the products please contact your local Danfoss Sales Company.

**Technical data**

- *Refrigerants*

SFA 10 (10 – 27 bar) and SFA 15 (10 – 40 bar) includes CR O-ring and is applicable for the refrigerants HCFC, HFC, R717 (Ammonia), R744 (CO<sub>2</sub>) within a temperature range of -50 °C to 100 °C (-58 °F to 212 °F) and a set pressure not lower than -30 °C (-22 °F) saturation temperature.

SFA 10 (28 – 65 bar) includes EPDM O-ring and is applicable for CO<sub>2</sub> with POE and PAG oil only. For use with CO<sub>2</sub> and other oil types please contact your local Danfoss sales company.

Flammable hydrocarbons are not recommended. For further information please contact your local Danfoss Sales Company.

At static temperatures below -30 °C (-22 °F) the O-ring becomes harder and full tightness of the valve cannot be guaranteed. Above -30 °C (-22 °F) the O-ring will become soft and fully functional again.

Observe for R744 (CO<sub>2</sub>)! Due to above the min set pressure for correct functional valve in R744 (CO<sub>2</sub>) is 27 bar (392 psig), to ensure proper function of the valve in case of a sudden relief.

At static temperatures above 60 °C (140 °F) the lifetime of the CR O-ring will be gradually reduced, and the valve should be serviced more frequently.

In case the valve has relieved please refer to the SFA 10 installation instruction.

- *Pressure*

*Pressure setting range:*

SFA 10: 10 – 65 bar (145 – 943 psig).

SFA 15: 10 – 40 bar (145 – 580 psig).

For further information please contact your local Danfoss Sales Company.

Important: The SFA safety relief valve is dependent on the back pressure (if the back pressure is higher than the atmospheric pressure, the opening pressure will be higher than stated set pressure).

- *Pressure setting*

The operating pressure of the plant should be at least 15% below the set pressure and the upstream pressure loss <3% of the valve set pressure. This allows a perfect re-seating of the safety relief valve after having been activated.


- Special circumstances such as vibrations (which should be avoided) and oscillating pressure may require an increased difference between the operational pressure and the closing pressure.



**Pressure Equipment Directive (PED)**  
 The SFA valves are approved in accordance with the European standard specified in the Pressure Equipment Directive and are CE marked.  
 For further details / restrictions - see Installation guide.

	SFA 10	SFA 15
<b>Nominal bore</b>	6.8 mm (¼ in.)	13 mm (0.512 in.)
<b>Classified for</b>	Fluid group I	
<b>Category</b>	IV	

**Design**

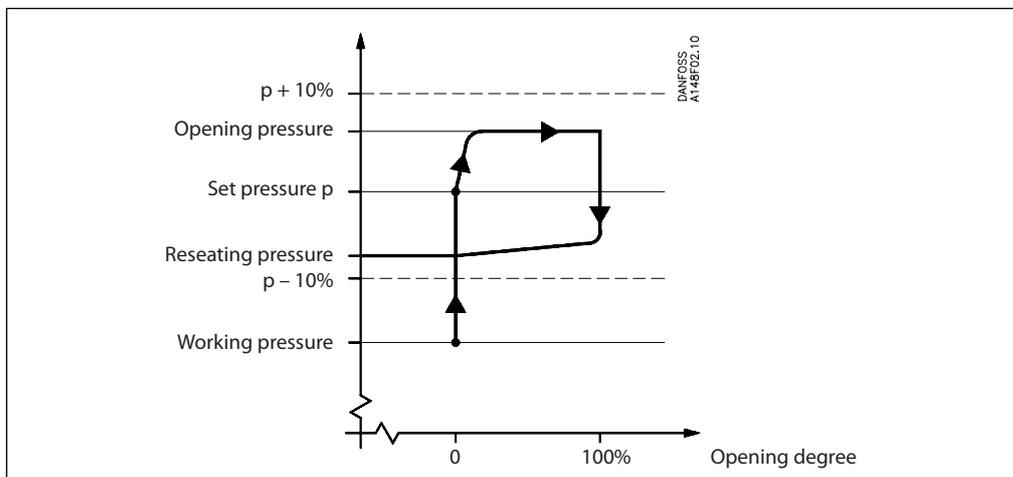

SFA is designed as a direct loaded safety valve recommended particularly for refrigeration applications. On a rise in pressure above the set pressure, the safety relief valve will initially start opening slightly, to minimize the outlet of refrigerant. If the pressure continues to increase,

the valve will open fully. The safety relief valve will be fully open before the pressure is 10% higher than set pressure, and fully closed before the pressure is 10% below set pressure.

**Connections**

Available with the following connections:

- Outside pipe thread T (ISO 228/1)
- Welding fittings, outlet (EN 10220)
- NPT male (ANSI/ASME B1.20.1) SFA 10 only

**Housing**

Made of special steel approved for low temperature operation. Spindle, cone, and seat are made of stainless steel, to ensure precise operation even during extraordinary conditions. The gasket of the valve cone is made of a special chloroprene (neoprene) compound.

**Installation**

To ensure exact operation of the safety relief valve it should be installed with the spring housing upwards. When the valve is mounted, it is important to avoid the influence of static, dynamic and thermal stress.

A very precise technique has been applied for the production of the seal. However, this seal can still be damaged, if dirt is blown from the pipe system into the valve.

It is recommended that safety relief valves exhaust into the open air with a U-pipe filled with oil on the discharge branch, to prevent dirt from penetrating into the valve.

In extreme environments it is recommended to use a valve with bellow instead, to protect the valve from refrigerant contaminated with dirt and particles.

It is also recommended that the valves be installed in pairs in conjunction with the double stop valve type DSV10, DSV1 or DSV2. For further information please see the data sheet for DSV.

**Re-calibration/servicing**

In certain countries the authorities demand that the valves are checked at least once a year (see local rules).

**Control/Identification**

After adjustment of the set pressure at Danfoss, the valves are sealed. For that reason Danfoss can only guarantee correct operation, if the seal remains unbroken.

All valves are provided with a metal plate with the following information:

- Flow diameter
- Set pressure
- Date of production
- Production number
- Type approved code.

**Transport/Handling**

The valves are fitted with special protection covers and packed into purpose made transportation cartons.

It is important that the cover remains fitted around the valve until it is installed.

*To ensure the exact and precise operation of the valve it must be handled with care.*

**Capacity**

The design and construction of the safety relief valve has been tested and approved by TÜV. This test comprises control of the function of the valve as well as measuring of the capacity, which is the basis of the curves and tables on the following pages. The values in the table are based on saturated gas.

If e.g. back pressure or superheated gas have to be taken into consideration, the formulas or the Danfoss computation program (Coolselector2™) can be used.

*Table 1.*

Valve	Nominal size		Flow diameter $d_o$	Flow area $A_o$	De-rated, certified coefficient of discharge $K_{dr}$	Effective discharge area $A_o \times K_{dr}$
	Inlet	Outlet				
<b>SFA 10</b>	10 mm	15 mm	6.8 mm	36.3 mm <sup>2</sup>	0.85	30.9 mm <sup>2</sup>
	3/8 in.	1/2 in.	0.268 in.	0.056 in <sup>2</sup>		0.048 in <sup>2</sup>
<b>SFA 15</b>	15 mm	20 mm	13 mm	133 mm <sup>2</sup>	0.73	97 mm <sup>2</sup>
	1/2 in.	3/4 in.	0.512 in.	0.206 in <sup>2</sup>		0.150 in <sup>2</sup>

The discharge capacity of the safety relief valves are based on (ISO 4126-1 / EN 1313 6).

$$q_m = 0.2883 \times C \times A_o \times K_{dr} \times K_b \sqrt{p}$$

$q_m$  Discharge capacity (kg/h).

$C$  Discharge function depending of the actual refrigerant ( $\kappa$ ) see table 2 (-).

$A_o$  Flow area of the safety relief valve (mm<sup>2</sup>).

$K_{dr}$  De-rated coefficient of discharge ( $K_{dr} = K_d \times 0.9$ ), (the  $K_{dr}$  is certified by TÜV) see table 1 (-).

$K_b$  Correction factor for sub-critical flow (-).

$K_b = 1.0$  when the back pressure is lower than approx.  $0.5 \times$  relieving pressure ( $P_b < 0.5 \times p$ ).

*For all SFV safety valves  $K_b = 1.0$*

$v$  Specific volume of the vapour at the relieving pressure  $p$ . (m<sup>3</sup>/kg).

$p_{set}$  Set pressure, the predetermined pressure at which a pressure relief valve under operation starts to open ( $p_{set}$  is indicated on the metal plate on the safety relief valve). (barauge)

$p_{atm}$  Atmospheric pressure (1 bar).


$p$  Relieving pressure,  $p = p_{set} \times 1.1 + P_{atm}$  (bar absolute).

For further details see the above-mentioned ISO or EN standards.

*Table 2. Properties of refrigerants*

Refrigerant	Isentropic exponent $\kappa$	Discharge function $C$
R22	1.17	2.54
R134a	1.12	2.50
R404A	1.12	2.49
R410A	1.17	2.54
R717 (Ammonia)	1.31	2.64
R744 (CO <sub>2</sub> )	1.30	2.63
Air	1.40	2.70


Capacity

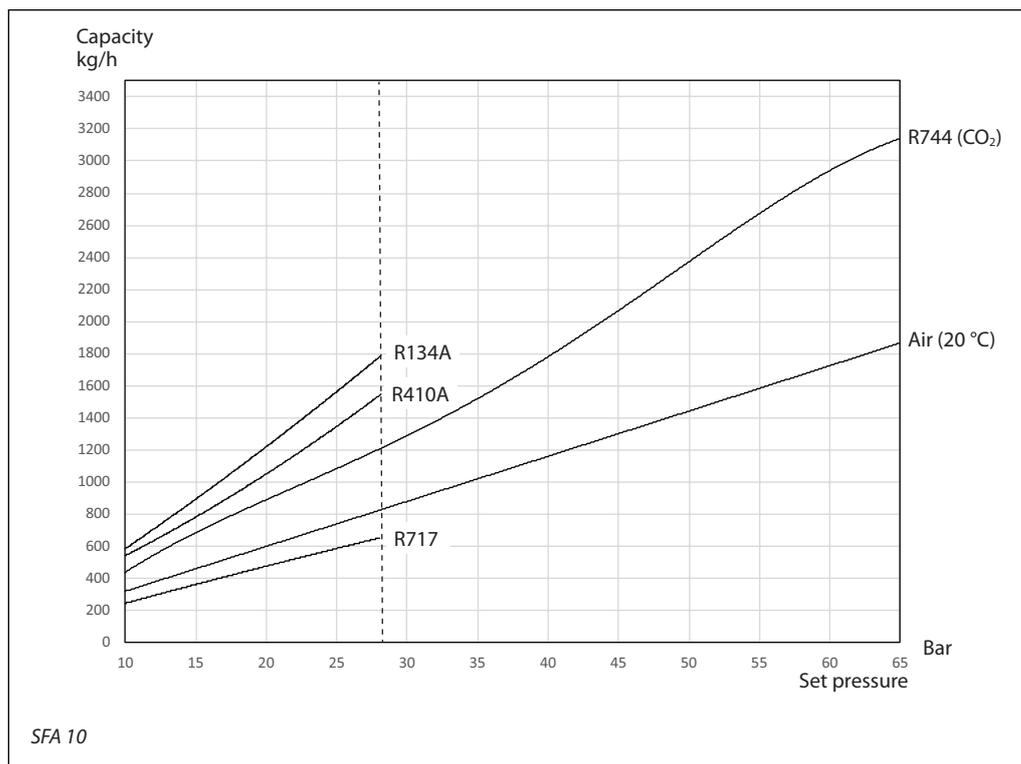

Capacity

Set pressure	qm	R134a	R410A	R717	R744 (CO <sub>2</sub> )	Air (20 °C)
10 bar 145 psig	kg/h lb/min	595.1 22.0	533.4 19.7	248.3 9.2	453.2 16.8	315.3 11.7
15 bar 218 psig	kg/h lb/min	889.0 32.9	791.2 29.3	361.7 13.4	662.7 24.5	460.5 17.0
20 bar 290 psig	kg/h lb/min	1208 44.7	1064 39.4	476.8 17.6	877.6 32.5	605.8 22.4
25 bar 363 psig	kg/h lb/min	1567 58.0	1359 50.3	593.9 22.0	1099 40.7	751.0 27.8
30 bar 392 psig	kg/h lb/min				1299 48.1	875.1 32.4
35 bar 145 psig	kg/h lb/min				1535 56.9	1017 37.7
40 bar 218 psig	kg/h lb/min				1784 66.1	1159 42.9
45 bar 290 psig	kg/h lb/min				2050 75.9	1301 48.2
50 bar 363 psig	kg/h lb/min				2341 86.7	1442 53.4
55 bar 392 psig	kg/h lb/min				2668 98.8	1584 58.7
60 bar 363 psig	kg/h lb/min				2994 110.9	1756 65.0
65 bar 392 psig	kg/h lb/min				3115 115.4	1868 69.2


Capacity

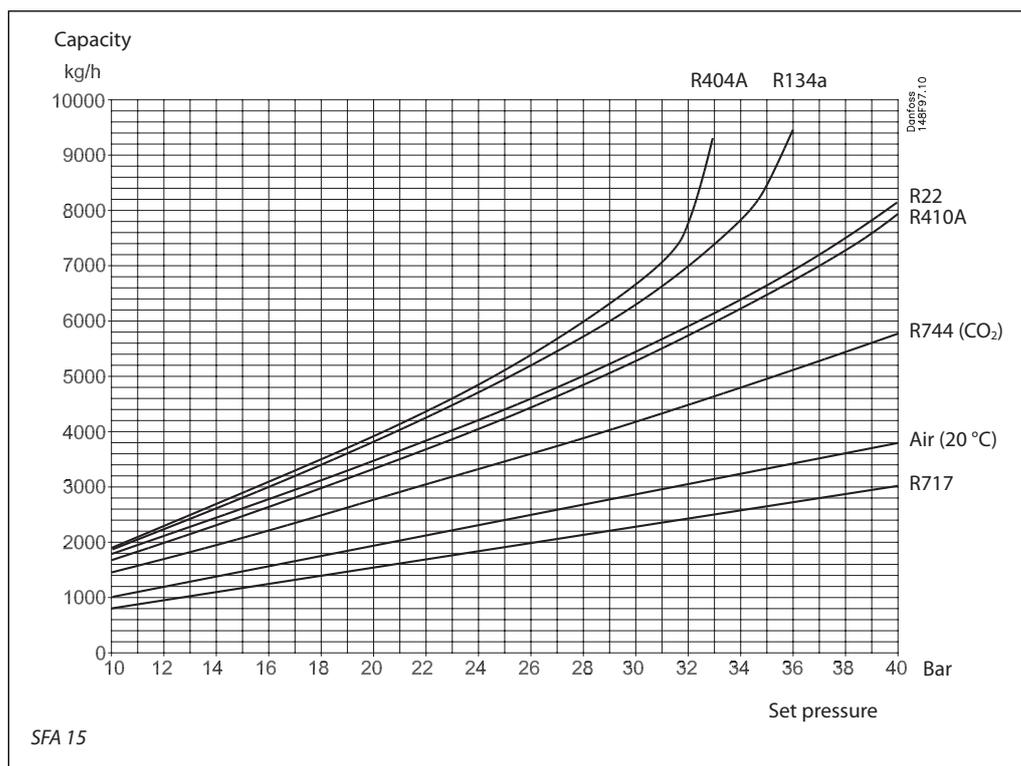

Capacity


Set pressure	qm	R22	R134a	R404A	R410A	R717	R744 (CO <sub>2</sub> )	Air (20 °C)
10 bar	kg/h	1749	1881	1888	1652	779	1424	1003
145 psig	lb/min	64	69	69	61	29	52	37
15 bar	kg/h	2592	2793	2842	2459	1135	2072	1462
218 psig	lb/min	95	103	104	90	42	76	54
20 bar	kg/h	3471	3804	3883	3305	1492	2747	1922
290 psig	lb/min	128	140	143	121	55	101	71
25 bar	kg/h	4409	4921	5101	4248	1853	3441	2381
363 psig	lb/min	162	181	187	156	68	126	87
30 bar	kg/h	5437	6269	6659	5250	2227	4163	2841
435 psig	lb/min	200	230	245	193	82	153	104
35 bar	kg/h	6633	8370		6450	2608	4936	3301
508 psig	lb/min	244	308		237	96	181	121
40 bar	kg/h	8104			7911	2989	5718	3760
580 psig	lb/min	298			291	110	210	138

Material specification SFA 10

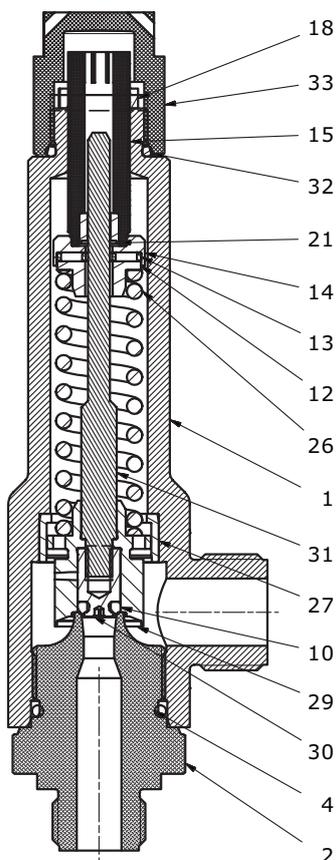

No.	Part	Material	DIN	ISO	ASTM
1	Bonnet long version	Steel, Carbon	P285QH		
2	Inlet body, SFA 10	Stainless Steel, Austenitic	X5CrNi 18-10		AISI 304
4	O-ring 25.07 x 2.62 CR	Chloroprene			
10	O-ring 6.02 x 2.62 CR	Chloroprene (10 – 27 bar) EPDM (28 – 65 bar)			
12	Lower bearing retainer	Stainless Steel, Austenitic	X8CrNiS18-9		AISI 303
13	Needle roller thrust bearings	Stainless Steel	SUS304-JIS G4305 G102Cr18Mo-GB/T3086		AISI 304
14	Top bearing retainer	Stainless Steel, Austenitic	X8CrNiS18-9		AISI 303
15	Adjusting screw	Stainless Steel	X5CrNi 18-10		AISI 304
18	Locknut SFA 10	Steel	11SMn30		
21	Bushing PTFE	Polystyrene, High Impact			
26	Spring	Steel			
27	Bushing SFA 10	Stainless Steel	X2CrNiMo17		AISI 316L
29	Cone for SFA 10	Stainless Steel	X5CrNi 18-10		AISI 304
30	O-ring Lock screw	Stainless Steel	X5CrNi 18-10		AISI 304
31	Spindle SFA 10	Stainless Steel	X5CrNi 18-10		AISI 304
32	O-ring 19.30 x 2.40	Chloroprene			
33	Cap on SFA 10	Stainless Steel	X5CrNi 18-10		AISI 304


Material specification SFA 15

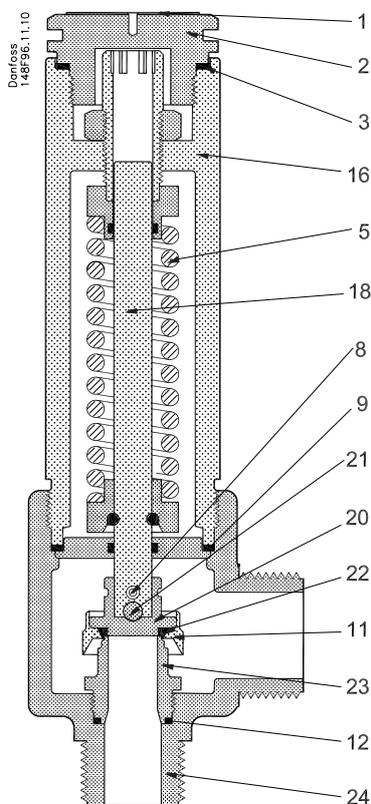


No.	Part	Material	DIN	ISO	ASTM
1	Marking label	Stainless steel			
2	Threaded plug	Steel			
3	Packing washer	Aluminium (Non-asbestos gasket)			
5	Spring	Steel	Class C, DIN17223		
8	Split	Steel	94 ELFORZ		
9	Packing washer	Aluminium (Non-asbestos gasket)			
11	Retainer	Stainless steel	X8CrNiS 18-9		AISI 303, A276
12	Packing washer	Aluminium (Non-asbestos gasket)			
16	Valve top	Steel	G20Mn5QT Alt. S235JRG2 Alt. S355J2G3	Fe360BFN Fe510D1	LCC, A352 A284C A572-50
18	Valve spindle	Stainless steel	X5CrNi 18-10		AISI 304, A276
20	Valve cone	Stainless steel	X8CrNiS 18-9		AISI 303, A276
21	Steel ball	Steel			
22	Valve cone seal	Cloroprene (Neoprene)			
23	Valve seat	Stainless steel	X8CrNiS 18-9		AISI 303, A276
24	Valve housing	Steel	G20Mn5QT Alt. P285QH		LCC, A352 LF2, A350

## Data sheet | Safety relief valves, Type SFA 10 and SFA 15


### Connections

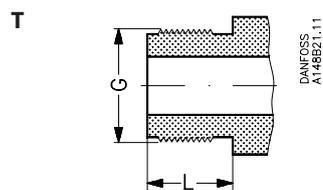

Type	Size mm	Size in.	Inlet	Outlet				L mm	L in.	
<i>T outside pipe thread, (ISO 228/1)</i>										
SFA 10	10	3/8	G 1/2	G 3/4				18	0.71	
SFA 15	15	1/2	G 3/4	G 1				15	0.59	

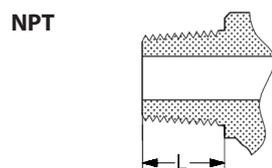


Type	Size mm	Size in.	Inlet	Outlet				L mm	L in.	
<i>NPT outside pipe thread, (ANSI/ASME B 1.20.1)</i>										
SFA 10	10	3/8	NPT 1/2	NPT 3/4				24	0.94	

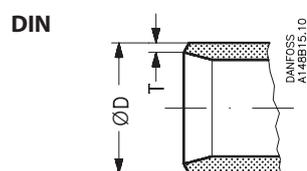


Type	Size mm	Size in.	Inlet (mm)		Inlet (in.)		Outlet (mm)		Outlet (in.)	
			OD	T	OD	T	OD	T	OD	T
<i>Welding fittings, DIN (2448)</i>										
SFA 10	10	3/8	-	-	-	-	21.1	2.2	0.83	0.087
SFA 15	15	1/2	21.3	2.3	0.839	0.091	26.9	2.3	1.059	0.091

Dimensions and weights

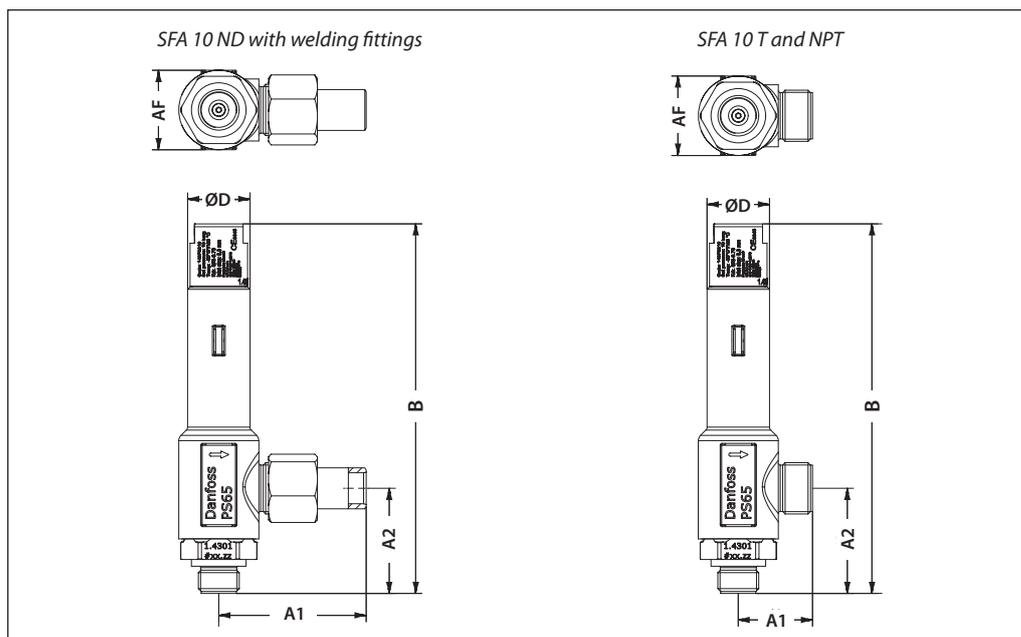

Valve size		A1	A2	B	ØD	AF	Weight
<i>10 – 27 bar</i>							
SFA 10 T	mm	38	54	175	32	41	0.95 kg
	in.	1.5	2.13	6.89	1.26	1.61	2.1 lbs
<i>10 – 27 bar</i>							
SFA 10 ND	mm	76	54	175	32	41	1.25 kg
	in.	2.99	2.13	6.89	1.26	1.61	2.75 lbs
<i>10 – 27 bar</i>							
SFA 10 NPT	mm	44	64	185	32	41	0.95 kg
	in.	1.73	2.52	7.28	1.26	1.61	2.1 lbs
<i>28 – 65 bar</i>							
SFA 10 T	mm	38	54	191	32	41	1.1 kg
	in.	1.5	2.13	7.52	1.26	1.61	2.42 lbs
<i>28 – 65 bar</i>							
SFA 10 ND	mm	76	54	191	32	41	1.4 kg
	in.	2.99	2.13	7.52	1.26	1.61	3.1 lbs
<i>28 – 65 bar</i>							
SFA 10 NPT	mm	44	64	201	32	41	1.1 kg
	in.	1.73	2.52	7.91	1.26	1.61	2.42 lbs

Specified weights are approximate values only.

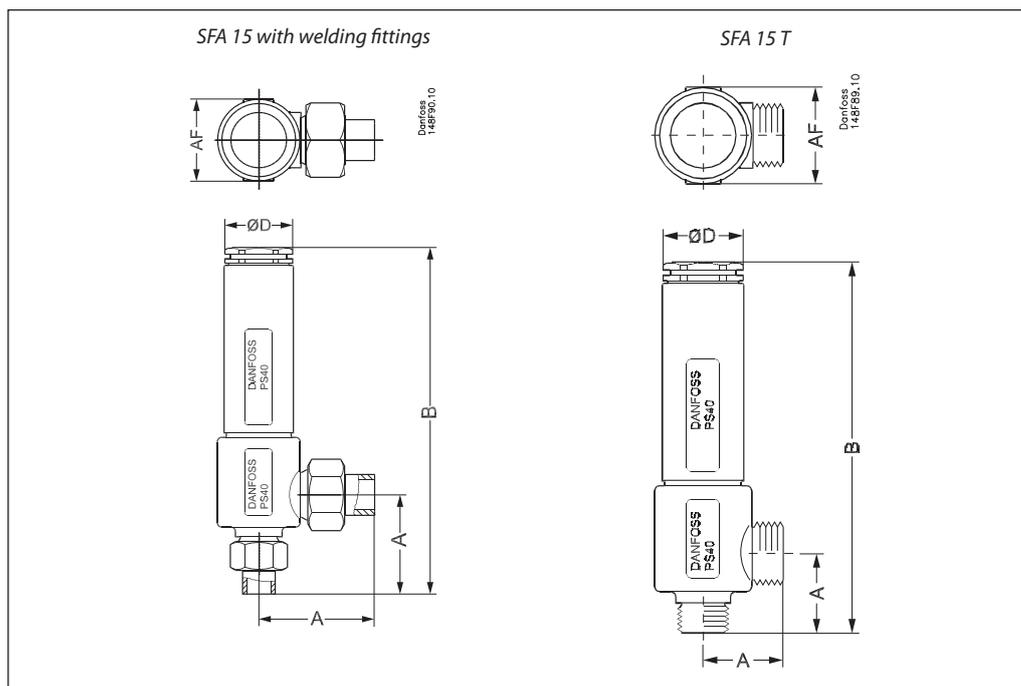

Valve size		A	B	ØD	AF	Weight
<i>SFA 15 T, with threaded connections ISO 228/1 pipe threads</i>						
SFA 15 T	mm	45	210	45	55	2.2 kg
(½ in.)	in.	1.77	8.27	1.81	2.17	4.9 lbs
<i>SFA 15 with welding fittings, DIN 2448</i>						
SFA 15	mm	83	248	45	55	2.5 kg
(½ in.)	in.	3.27	9.76	1.81	2.17	5.5 lbs

Specified weights are approximate values only.

Ordering

Certified SFA 10 valves with standard set pressure

Certified SFA 10 valves with standard set pressure and TÜV pressure setting certificate with each valve

Size		Type	Set pressure bar (psig)	Code number
mm.	in.			
10	3/8	SFA 10 T 210	10 (145)	148F4210
10	3/8	SFA 10 T 211	11 (160)	148F4211
10	3/8	SFA 10 T 212	12 (174)	148F4212
10	3/8	SFA 10 T 213	13 (189)	148F4213
10	3/8	SFA 10 T 214	14 (203)	148F4214
10	3/8	SFA 10 T 215	15 (218)	148F4215
10	3/8	SFA 10 T 216	16 (232)	148F4216
10	3/8	SFA 10 T 217	17 (247)	148F4217
10	3/8	SFA 10 T 218	18 (261)	148F4218
10	3/8	SFA 10 T 219	19 (276)	148F4219
10	3/8	SFA 10 T 220	20 (290)	148F4220
10	3/8	SFA 10 T 221	21 (305)	148F4221
10	3/8	SFA 10 T 222	22 (319)	148F4222
10	3/8	SFA 10 T 223	23 (334)	148F4223
10	3/8	SFA 10 T 224	24 (348)	148F4224
10	3/8	SFA 10 T 225	25 (363)	148F4225
10	3/8	SFA 10 T 226	26 (377)	148F4226
10	3/8	SFA 10 T 227	27 (392)	148F4227
10	3/8	SFA 10 T 228	28 (406)	148F4228
10	3/8	SFA 10 T 229	29 (421)	148F4229
10	3/8	SFA 10 T 230	30 (435)	148F4230
10	3/8	SFA 10 T 231	31 (450)	148F4231
10	3/8	SFA 10 T 232	32 (464)	148F4232
10	3/8	SFA 10 T 233	33 (479)	148F4233
10	3/8	SFA 10 T 234	34 (493)	148F4234
10	3/8	SFA 10 T 235	35 (508)	148F4235
10	3/8	SFA 10 T 236	36 (522)	148F4236
10	3/8	SFA 10 T 237	37 (537)	148F4237
10	3/8	SFA 10 T 238	38 (551)	148F4238
10	3/8	SFA 10 T 239	39 (566)	148F4239
10	3/8	SFA 10 T 240	40 (580)	148F4240
10	3/8	SFA 10 T 241	41 (595)	148F4241
10	3/8	SFA 10 T 242	42 (609)	148F4242
10	3/8	SFA 10 T 243	43 (624)	148F4243
10	3/8	SFA 10 T 244	44 (638)	148F4244
10	3/8	SFA 10 T 245	45 (653)	148F4245
10	3/8	SFA 10 T 246	46 (667)	148F4246
10	3/8	SFA 10 T 247	47 (682)	148F4247
10	3/8	SFA 10 T 248	48 (696)	148F4248
10	3/8	SFA 10 T 249	49 (711)	148F4249
10	3/8	SFA 10 T 250	50 (725)	148F4250
10	3/8	SFA 10 T 251	51 (740)	148F4251
10	3/8	SFA 10 T 252	52 (754)	148F4252
10	3/8	SFA 10 T 253	53 (769)	148F4253
10	3/8	SFA 10 T 254	54 (783)	148F4254
10	3/8	SFA 10 T 255	55 (798)	148F4255
10	3/8	SFA 10 T 256	56 (812)	148F4256
10	3/8	SFA 10 T 257	57 (827)	148F4257
10	3/8	SFA 10 T 258	58 (841)	148F4258
10	3/8	SFA 10 T 259	59 (856)	148F4259
10	3/8	SFA 10 T 260	60 (870)	148F4260
10	3/8	SFA 10 T 261	61 (885)	148F4261
10	3/8	SFA 10 T 262	62 (899)	148F4262
10	3/8	SFA 10 T 263	63 (914)	148F4263
10	3/8	SFA 10 T 264	64 (928)	148F4264
10	3/8	SFA 10 T 265	65 (943)	148F4265

Size		Type	Set pressure bar (psig)	Code number
mm.	in.			
10	3/8	SFA 10 T 310	10 (145)	148F4310
10	3/8	SFA 10 T 311	11 (160)	148F4311
10	3/8	SFA 10 T 312	12 (174)	148F4312
10	3/8	SFA 10 T 313	13 (189)	148F4313
10	3/8	SFA 10 T 314	14 (203)	148F4314
10	3/8	SFA 10 T 315	15 (218)	148F4315
10	3/8	SFA 10 T 316	16 (232)	148F4316
10	3/8	SFA 10 T 317	17 (247)	148F4317
10	3/8	SFA 10 T 318	18 (261)	148F4318
10	3/8	SFA 10 T 319	19 (276)	148F4319
10	3/8	SFA 10 T 320	20 (290)	148F4320
10	3/8	SFA 10 T 321	21 (305)	148F4321
10	3/8	SFA 10 T 322	22 (319)	148F4322
10	3/8	SFA 10 T 323	23 (334)	148F4323
10	3/8	SFA 10 T 324	24 (348)	148F4324
10	3/8	SFA 10 T 325	25 (363)	148F4325
10	3/8	SFA 10 T 326	26 (377)	148F4326
10	3/8	SFA 10 T 327	27 (392)	148F4327
10	3/8	SFA 10 T 328	28 (406)	148F4328
10	3/8	SFA 10 T 329	29 (421)	148F4329
10	3/8	SFA 10 T 330	30 (435)	148F4330
10	3/8	SFA 10 T 331	31 (450)	148F4331
10	3/8	SFA 10 T 332	32 (464)	148F4332
10	3/8	SFA 10 T 333	33 (479)	148F4333
10	3/8	SFA 10 T 334	34 (493)	148F4334
10	3/8	SFA 10 T 335	35 (508)	148F4335
10	3/8	SFA 10 T 336	36 (522)	148F4336
10	3/8	SFA 10 T 337	37 (537)	148F4337
10	3/8	SFA 10 T 338	38 (551)	148F4338
10	3/8	SFA 10 T 339	39 (566)	148F4339
10	3/8	SFA 10 T 340	40 (580)	148F4340
10	3/8	SFA 10 T 341	41 (595)	148F4341
10	3/8	SFA 10 T 342	42 (609)	148F4342
10	3/8	SFA 10 T 343	43 (624)	148F4343
10	3/8	SFA 10 T 344	44 (638)	148F4344
10	3/8	SFA 10 T 345	45 (653)	148F4345
10	3/8	SFA 10 T 346	46 (667)	148F4346
10	3/8	SFA 10 T 347	47 (682)	148F4347
10	3/8	SFA 10 T 348	48 (696)	148F4348
10	3/8	SFA 10 T 349	49 (711)	148F4349
10	3/8	SFA 10 T 350	50 (725)	148F4350
10	3/8	SFA 10 T 351	51 (740)	148F4351
10	3/8	SFA 10 T 352	52 (754)	148F4352
10	3/8	SFA 10 T 353	53 (769)	148F4353
10	3/8	SFA 10 T 354	54 (783)	148F4354
10	3/8	SFA 10 T 355	55 (798)	148F4355
10	3/8	SFA 10 T 356	56 (812)	148F4356
10	3/8	SFA 10 T 357	57 (827)	148F4357
10	3/8	SFA 10 T 358	58 (841)	148F4358
10	3/8	SFA 10 T 359	59 (856)	148F4359
10	3/8	SFA 10 T 360	60 (870)	148F4360
10	3/8	SFA 10 T 361	61 (885)	148F4361
10	3/8	SFA 10 T 362	62 (899)	148F4362
10	3/8	SFA 10 T 363	63 (914)	148F4363
10	3/8	SFA 10 T 364	64 (928)	148F4364
10	3/8	SFA 10 T 365	65 (943)	148F4365

*Certified SFA 10 valves with standard set pressure*

Size		Type	Set pressure bar (psig)	Code number
mm.	in.			
10	3/8	SFA 10 NPT 213	13 (189)	<b>148F5213</b>
10	3/8	SFA 10 NPT 216	16 (232)	<b>148F5216</b>
10	3/8	SFA 10 NPT 217	17 (247)	<b>148F5217</b>
10	3/8	SFA 10 NPT 218	18 (261)	<b>148F5218</b>
10	3/8	SFA 10 NPT 220	20 (290)	<b>148F5220</b>
10	3/8	SFA 10 NPT 221	21 (305)	<b>148F5221</b>
10	3/8	SFA 10 NPT 222	22 (319)	<b>148F5222</b>
10	3/8	SFA 10 NPT 224	24 (348)	<b>148F5224</b>
10	3/8	SFA 10 NPT 225	25 (363)	<b>148F5225</b>
10	3/8	SFA 10 NPT 228	28 (406)	<b>148F5228</b>
10	3/8	SFA 10 NPT 232	32 (464)	<b>148F5232</b>
10	3/8	SFA 10 NPT 235	35 (508)	<b>148F5235</b>
10	3/8	SFA 10 NPT 238	38 (551)	<b>148F5238</b>
10	3/8	SFA 10 NPT 240	40 (580)	<b>148F5240</b>
10	3/8	SFA 10 NPT 250	50 (725)	<b>148F5250</b>
10	3/8	SFA 10 NPT 252	52 (754)	<b>148F5252</b>
10	3/8	SFA 10 NPT 260	60 (870)	<b>148F5260</b>
10	3/8	SFA 10 NPT 265	65 (943)	<b>148F5265</b>

*Certified SFA 10 valves with standard set pressure + DSV 10 NPT*

Size		Type	Set pressure bar (psig)	Code number
mm.	in.			
10	3/8	SFA 10/DSV 10 NPT 213	13 (189)	<b>148F6313</b>
10	3/8	SFA 10/DSV 10 NPT 216	16 (232)	<b>148F6316</b>
10	3/8	SFA 10/DSV 10 NPT 217	17 (247)	<b>148F6317</b>
10	3/8	SFA 10/DSV 10 NPT 218	18 (261)	<b>148F6318</b>
10	3/8	SFA 10/DSV 10 NPT 220	20 (290)	<b>148F6320</b>
10	3/8	SFA 10/DSV 10 NPT 221	21 (305)	<b>148F6321</b>
10	3/8	SFA 10/DSV 10 NPT 222	22 (319)	<b>148F6322</b>
10	3/8	SFA 10/DSV 10 NPT 224	24 (348)	<b>148F6324</b>
10	3/8	SFA 10/DSV 10 NPT 225	25 (363)	<b>148F6325</b>
10	3/8	SFA 10/DSV 10 NPT 228	28 (406)	<b>148F6328</b>
10	3/8	SFA 10/DSV 10 NPT 232	32 (464)	<b>148F6332</b>
10	3/8	SFA 10/DSV 10 NPT 235	35 (508)	<b>148F6335</b>
10	3/8	SFA 10/DSV 10 NPT 238	38 (551)	<b>148F6338</b>
10	3/8	SFA 10/DSV 10 NPT 240	40 (580)	<b>148F6340</b>
10	3/8	SFA 10/DSV 10 NPT 250	50 (725)	<b>148F6350</b>
10	3/8	SFA 10/DSV 10 NPT 252	52 (754)	<b>148F6352</b>
10	3/8	SFA 10/DSV 10 NPT 260	60 (870)	<b>148F6360</b>
10	3/8	SFA 10/DSV 10 NPT 265	65 (943)	<b>148F6365</b>

*Certified SFA 15 T valves with standard set pressure*

Size		Type	Set pressure bar (psig)	Code number
mm	in.			
15	½	SFA 15 T 210	10 (145)	<b>148F3210</b>
15	½	SFA 15 T 211	11 (160)	<b>148F3211</b>
15	½	SFA 15 T 212	12 (174)	<b>148F3212</b>
15	½	SFA 15 T 213	13 (189)	<b>148F3213</b>
15	½	SFA 15 T 214	14 (203)	<b>148F3214</b>
15	½	SFA 15 T 215	15 (218)	<b>148F3215</b>
15	½	SFA 15 T 216	16 (232)	<b>148F3216</b>
15	½	SFA 15 T 217	17 (247)	<b>148F3217</b>
15	½	SFA 15 T 218	18 (261)	<b>148F3218</b>
15	½	SFA 15 T 219	19 (276)	<b>148F3219</b>
15	½	SFA 15 T 220	20 (290)	<b>148F3220</b>
15	½	SFA 15 T 221	21 (305)	<b>148F3221</b>
15	½	SFA 15 T 222	22 (319)	<b>148F3222</b>
15	½	SFA 15 T 223	23 (334)	<b>148F3223</b>
15	½	SFA 15 T 224	24 (348)	<b>148F3224</b>
15	½	SFA 15 T 225	25 (363)	<b>148F3225</b>
15	½	SFA 15 T 226	26 (377)	<b>148F3226</b>
15	½	SFA 15 T 227	27 (392)	<b>148F3227</b>
15	½	SFA 15 T 228	28 (406)	<b>148F3228</b>
15	½	SFA 15 T 229	29 (421)	<b>148F3229</b>
15	½	SFA 15 T 230	30 (435)	<b>148F3230</b>
15	½	SFA 15 T 231	31 (450)	<b>148F3231</b>
15	½	SFA 15 T 232	32 (464)	<b>148F3232</b>
15	½	SFA 15 T 233	33 (479)	<b>148F3233</b>
15	½	SFA 15 T 234	34 (493)	<b>148F3234</b>
15	½	SFA 15 T 235	35 (508)	<b>148F3235</b>
15	½	SFA 15 T 236	36 (522)	<b>148F3236</b>
15	½	SFA 15 T 237	37 (537)	<b>148F3237</b>
15	½	SFA 15 T 238	38 (551)	<b>148F3238</b>
15	½	SFA 15 T 239	39 (566)	<b>148F3239</b>
15	½	SFA 15 T 240	40 (580)	<b>148F3240</b>

*Certified SFA 15 T valves with standard set pressure  
and TÜV pressure setting certificate with each valve*

Size		Type	Set pressure bar (psig)	Code number
mm	in.			
15	½	SFA 15 T 310	10 (145)	<b>148F3310</b>
15	½	SFA 15 T 311	11 (160)	<b>148F3311</b>
15	½	SFA 15 T 312	12 (174)	<b>148F3312</b>
15	½	SFA 15 T 313	13 (189)	<b>148F3313</b>
15	½	SFA 15 T 314	14 (203)	<b>148F3314</b>
15	½	SFA 15 T 315	15 (218)	<b>148F3315</b>
15	½	SFA 15 T 316	16 (232)	<b>148F3316</b>
15	½	SFA 15 T 317	17 (247)	<b>148F3317</b>
15	½	SFA 15 T 318	18 (261)	<b>148F3318</b>
15	½	SFA 15 T 319	19 (276)	<b>148F3319</b>
15	½	SFA 15 T 320	20 (290)	<b>148F3320</b>
15	½	SFA 15 T 321	21 (305)	<b>148F3321</b>
15	½	SFA 15 T 322	22 (319)	<b>148F3322</b>
15	½	SFA 15 T 323	23 (334)	<b>148F3323</b>
15	½	SFA 15 T 324	24 (348)	<b>148F3324</b>
15	½	SFA 15 T 325	25 (363)	<b>148F3325</b>
15	½	SFA 15 T 326	26 (377)	<b>148F3326</b>
15	½	SFA 15 T 327	27 (392)	<b>148F3327</b>
15	½	SFA 15 T 328	28 (406)	<b>148F3328</b>
15	½	SFA 15 T 329	29 (421)	<b>148F3329</b>
15	½	SFA 15 T 330	30 (435)	<b>148F3330</b>
15	½	SFA 15 T 331	31 (450)	<b>148F3331</b>
15	½	SFA 15 T 332	32 (464)	<b>148F3332</b>
15	½	SFA 15 T 333	33 (479)	<b>148F3333</b>
15	½	SFA 15 T 334	34 (493)	<b>148F3334</b>
15	½	SFA 15 T 335	35 (508)	<b>148F3335</b>
15	½	SFA 15 T 336	36 (522)	<b>148F3336</b>
15	½	SFA 15 T 337	37 (537)	<b>148F3337</b>
15	½	SFA 15 T 338	38 (551)	<b>148F3338</b>
15	½	SFA 15 T 339	39 (566)	<b>148F3339</b>
15	½	SFA 15 T 340	40 (580)	<b>148F3340</b>

## Ordering

### Spare parts

Type	Code number
SFA 10/DSV 10 Inspection kit	148F3068
SFA 10 Repair Kit 10 – 27 bar*	148F3069
SFA 10 Repair Kit 28 – 65 bar*	148F3070
SFA 15/DSV 1 inspection kit	148F3029
Repair kit SFA 15	148F3036

\* Inspection kit should be ordered with any repair kit

### Accessories

Type	Code number
DSV/SFA/SFV Non-stick grease	148F3064
DSV 10 Cap and alu gasket for testing (1 set)	148F3063
DSV 10 T Plug ½" NPT (1 set)	148F3072
SFA 10 G Inlet weld connector	148F3075
SFA 10 NPT Inlet weld connector	148F3076
Nipples + gaskets set for SFA 10, SFV 15/SFA 15*	148F3019

\*Weld nipple for SFA 10 inlet (G ½") not included in 148F3019.  
Order 148F3075 in addition to.